
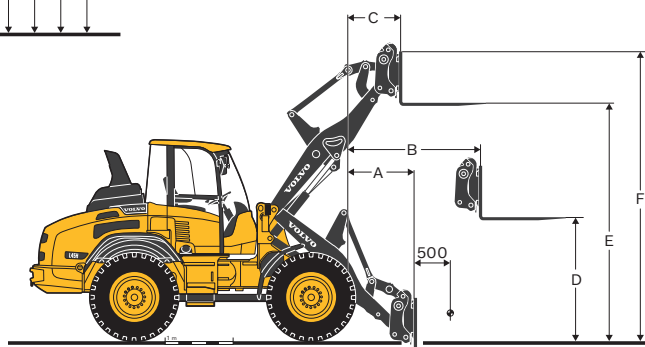
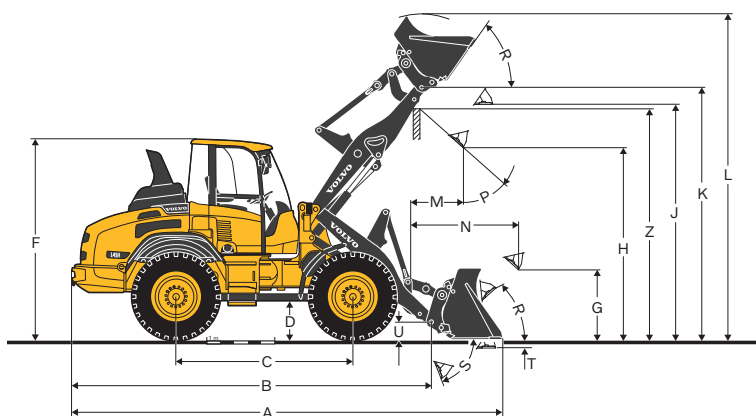
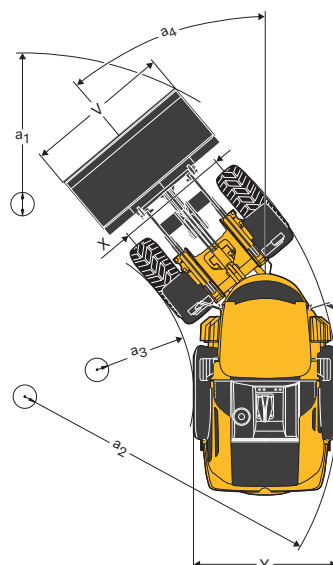



Specifiche del modello L45H

		Con cinematismo TP, staffa portattrezzi TPV e pneumatici 15.5-25	Con cinematismo TPZ, staffa portattrezzi TPV e pneumatici 15.5-25
B	mm	5 320	5 325
C	mm	2 650	2 650
D	mm	395	395
F	mm	2 950	2 950
G	mm	1 000	1 000
J	mm	3 430	3 430
K	mm	3 685	3 685
O	SDgr	55	55
P	SDgr	45	45
R	SDgr	45	45
S	SDgr	75	75
U	mm	255	255
X	mm	1 750	1 750
Y	mm	2 150	2 150
Z	mm	3 445	3 360
a ₂	mm	4 745	4 745
a ₃	mm	2 555	2 555
a ₄	SDgr	40	40



Con forza di carico		Staffa portattrezzi TPV	Staffa portattrezzi TPV, braccio lungo	Staffa portattrezzi TPZ	Staffa portattrezzi TPZ, braccio lungo
					
Baricentro 500 mm					
A	mm	785	1 135	650	1 020
B	mm	1 475	1 745	1 375	1 645
C	mm	650	825	550	725
D	mm	1 705	1 705	1 740	1 740
E	mm	3 490	3 695	3 530	3 735
F	mm	4 225	4 430	4 265	4 470
Carico di ribaltamento in massima sterzata (ISO 14397)	kg	4 420	3 920	4 670	4 170
Carico di lavoro conforme a EN 474-3, 60/80%	kg	2 650 / 3 530	2 350 / 3 130	2 800 / 3 730	2 500 / 3 330
Carico di lavoro 80%, posizione di trasporto, 40 gradi e massima sterzata	kg	4 000	-	4 000	-